


10×9.5 Square/Multiturn/Trimming Potentiometer


-- 3296W--



... Install dimension...

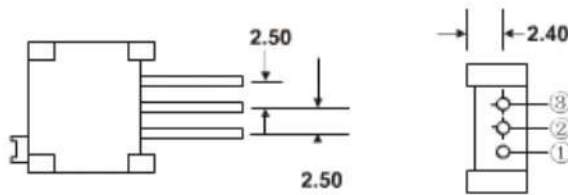


... Mutual dimension...

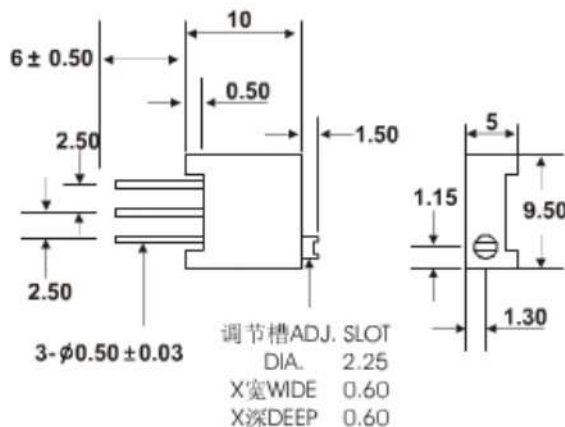

Standard Resistance Table

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205

Special resistances available

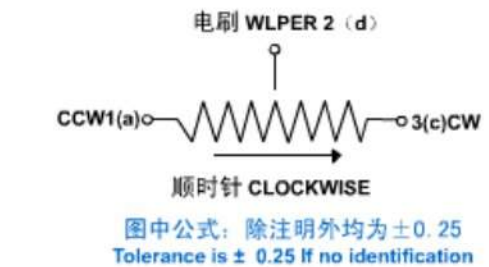

Electrical Characteristics

Standard Resistance Range	50Ω ~ 2MΩ
Resistance Tolerance	±10%
Absolute Minimum Resistance	≤1% 或 10Ω
Contact Resistance Variation	CRV ≤ 3% 或 5Ω
Insulation Resistance	R1 ≥ 1GΩ (100Vac)
Withstand Voltage	640Vac
Effective Travel	28 rums nom

Environmental Characteristics

Power Rating, 315 volts max	0.5W@70°C, 0W@125°C
Temperature Range	-55°C ~ 125°C
Temperature Coefficient	±250ppm/°C
Temperature Variation	55°C, 30min, +125°C
	30min 5cycles
	ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 5%
Vibration	10 ~ 500Hz, 0.75mm, 6h,
	ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 7.5%
Collision	390m/s ² , 4000cycles, ΔR ≤ 5%R
Electrical Endurance at 70°C	0.5W@70°C
	1000h, ΔR ≤ 10%R, CRV ≤ 3% or 5Ω

How To Order

